




Main/Emergency-Off Switch in sloping roof enclosure - 3 Pole, 3 Pole + Neutral & 4 Pole 25A - 125A



DIMENSIONS

Encl. Ref.	Front Plate		Side View		
	H1	W1	D1	D2	H2
SR04	170	130	103	122	196
SR14	193	130	132	151	234
SR24	278	185	152	170	324

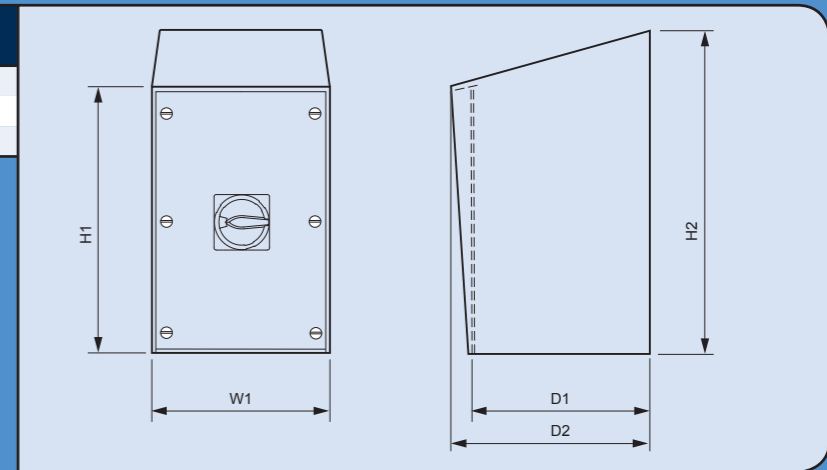

- IP65 protection
- red/yellow handle as standard
- optional black handle available
- range from 20A-125A
- brushed stainless steel enclosure, grade 304L
- integral canopy
- other options available on request



le AC-21A	Encl. Ref.	3 Pole +2 n/o aux		3 Pole + solid neutral +2 n/o aux		4 Pole (3ph + Sw N <sup>1</sup> ) +2 n/o aux		le AC-21A
20A	SR04	KG10	T203/GBA630 *SR04			KG10	T204/GBA650 *SR04	20A
25A	SR04	KG20	T203/GBA630 *SR04	KG20	T207/GBA640 *SR04	KG20	T204/GBA650 *SR04	25A
32A	SR04	KG32	T203/GBA630 *SR04	KG32	T207/GBA640 *SR04	KG32	T204/GBA650 *SR04	32A
25A	SR14	KG20	T203/GBA601 *SR14	KG20	T207/GBA603 *SR14	KG20	T204/GBA602 *SR14	25A
32A	SR14	KG32	T203/GBA601 *SR14	KG32	T207/GBA603 *SR14	KG32	T204/GBA602 *SR14	32A
40A	SR14	KG41	T203/GBA601 *SR14	KG41	T207/GBA603 *SR14	KG41	T204/GBA602 *SR14	40A
63A	SR14	KG64	T203/GBA601 *SR14	KG64	T207/GBA603 *SR14	KG64	T204/GBA602 *SR14	63A
80A	SR24	KG80	T203/GBA601 *SR24	KG80	T207/GBA603 *SR24	KG80	T204/GBA602 *SR24	80A
100A	SR24	KG100	T203/GBA601 *SR24	KG100	T207/GBA603 *SR24	KG100	T204/GBA602 *SR24	100A
125A	SR24	KG105	T203/GBA601 *SR24	KG105	T207/GBA603 *SR24	KG105	T204/GBA602 *SR24	125A

- The 15° Sloping Roof deflects water and prevents items from being placed on top of the enclosure, making it easier and safer to clean

**Note**  
1) Switched neutral pole is early make/late break.


Main/Emergency-Off Switch in sloping roof enclosure with mounting plate - 3 Pole, 3 Pole + Neutral



DIMENSIONS

Encl. Ref.	Front View			
	H1	W1	W2	W3
SR04L	171	130	155	180
SR14L	209	130	155	180
SR24L	299	185	210	260

Encl. Ref.	Side View		
	H2	D1	D2
SR04L	196	104.2	123.2
SR14L	234	133.2	152.2
SR24L	324	153.2	171.2

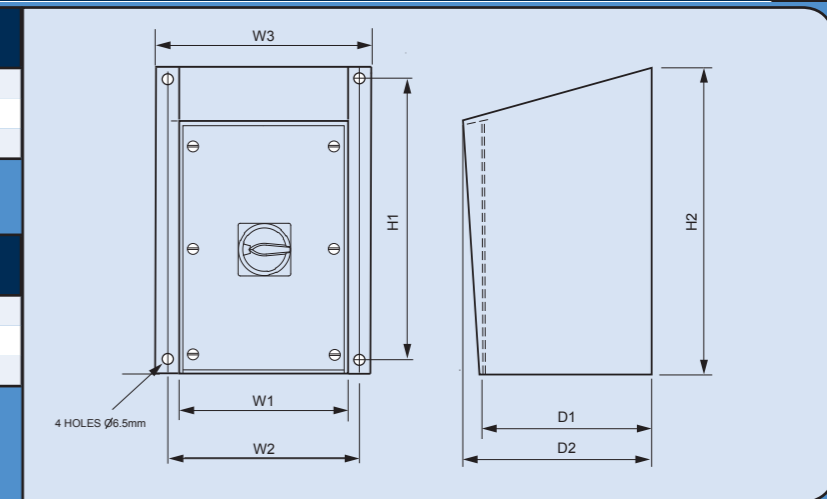

- IP65 protection
- welded back mounting plate
- red/yellow handle as standard
- optional black handle available
- range from 20A-125A
- brushed stainless steel enclosure, grade 304L
- integral canopy



le AC-21A	Encl. Ref.	3 Pole +2 n/o aux		3 Pole + solid neutral +2 n/o aux		4 Pole (3ph + Sw N <sup>1</sup> ) +2 n/o aux		le AC-21A
20A	SR04L	KG10	T203/GBA660 *SR04L			KG10	T204/GBA680 *SR04L	20A
25A	SR04L	KG20	T203/GBA660 *SR04L	KG20	T207/GBA670 *SR04L	KG20	T204/GBA680 *SR04L	25A
25A	SR04L	KG32	T203/GBA660 *SR04L	KG32	T207/GBA670 *SR04L	KG32	T204/GBA680 *SR04L	32A
32A	SR14L	KG20	T203/GBA601 *SR14L	KG20	T207/GBA603 *SR14L	KG20	T204/GBA602 *SR14L	25A
32A	SR14L	KG32	T203/GBA601 *SR14L	KG32	T207/GBA603 *SR14L	KG32	T204/GBA602 *SR14L	32A
40A	SR14L	KG41	T203/GBA601 *SR14L	KG41	T207/GBA603 *SR14L	KG41	T204/GBA602 *SR14L	40A
63A	SR14L	KG64	T203/GBA601 *SR14L	KG64	T207/GBA603 *SR14L	KG64	T204/GBA602 *SR14L	63A
80A	SR24L	KG80	T203/GBA601 *SR24L	KG80	T207/GBA603 *SR24L	KG80	T204/GBA602 *SR24L	80A
100A	SR24L	KG100	T203/GBA601 *SR24L	KG100	T207/GBA603 *SR24L	KG100	T204/GBA602 *SR24L	100A
125A	SR24L	KG105	T203/GBA601 *SR24L	KG105	T207/GBA603 *SR24L	KG105	T204/GBA602 *SR24L	125A

**Note**  
1) Switched neutral pole is early make/late break.